


FIRST FLOOR

12196

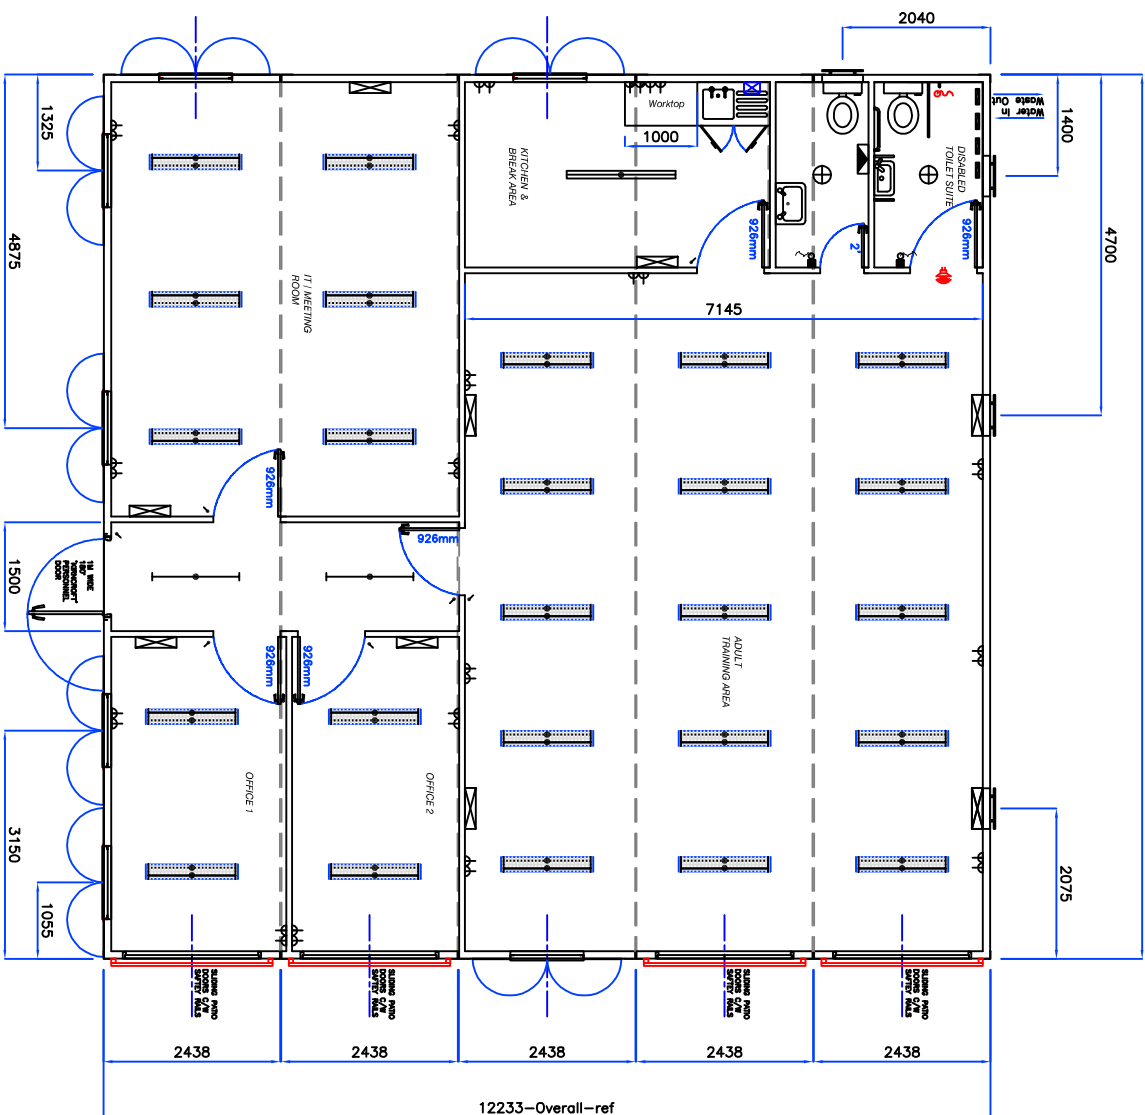

LEGEND

	Consumer Unit
	Light Switch
	Pull Switch
	Bulkhead Light
	4' Vapour Proof Light
	4' Cat2 Light
	Dbl. Skt. 300mm Up F.F.L.
	Dbl. Skt. 1100mm Up F.F.L.
	Connector Header
	Downflow Header
	4' Tube Heater & Guard
	Thermostat/Spur
	Audio/Visual Alarm
	Undersink Water Heater

PLEASE NOTE

INTERNAL CEILING HEIGHT TO BE 2400mm MIN.

INSULATION DETAILS:
 CEILING: 70mm KINGSPAN (FOILED).
 CEILING: 150mm LOFT INSULATION.
 WALLS: 70mm KINGSPAN (FOILED).
 WALLS: 40mm KINGSPAN (FOILED).
 FLOOR: 150mm LOFT INSULATION.
 UNIT TO BE UNDERPANNED.

LINING DETAILS

WALLS	PLASTERBOARD LINED & INSULATED
CEILING	PLASTERBOARD LINED & INSULATED
TRIMS	WHITE PLASTIC
FLOOR	VINYL FLOORING OVER 15mm PLY

REV.	DATE	DETAILS.
------	------	----------

APPROVAL BOX	
Name:	Signature:
Position:	Date:

DRAWN	JT	DATE	14/04/10
-------	----	------	----------

Title:
 Mac Containers
 5 Off, 40'x8'x10' High Linked Units--Upper Floor

Dwg. No.
 MAC_4008LXN01
 Sht.2 Of 2